

FREMANTLE PORTS

Common-User Berths North Quay



Common-User Berths - North Quay



NORTH QUAY

North Quay provides 811 metres of common-user wharf at Berths 1-2 and 11-12. These berths have a design depth alongside of 14.7 metres*, good road access and are fitted with bunkers and water outlets, and electricity.


Berths 11 and 12 are heavy duty. They have substantial stacking areas and are suitable for the handling of general and break-bulk cargoes.

BERTH	BERTH LENGTH	WHARF HEIGHT	STACKING AREA
1	207 metres	4.0 metres	16,130 metres ²
2	175 metres	4.0 metres	7,945 metres ²
11	196 metres	4.3 metres	26,203 metres ²
12	233 metres	4.3 metres	12,906 metres ²


* The design depth alongside is subject to siltation and variations to the depth displayed may occur. Enquiries should be directed to the Harbour Master's office to confirm depths alongside particular berths. All depths are related to Low Water Mark Fremantle being 0.2 metres below LAT.

The Port of Fremantle operates a Dynamic Under Keel Clearance (DUKC) program which nominates specific under keel criteria for applicable vessels. Enquiries should be directed to the Harbour Master's office to confirm maximum drafts for any given time.



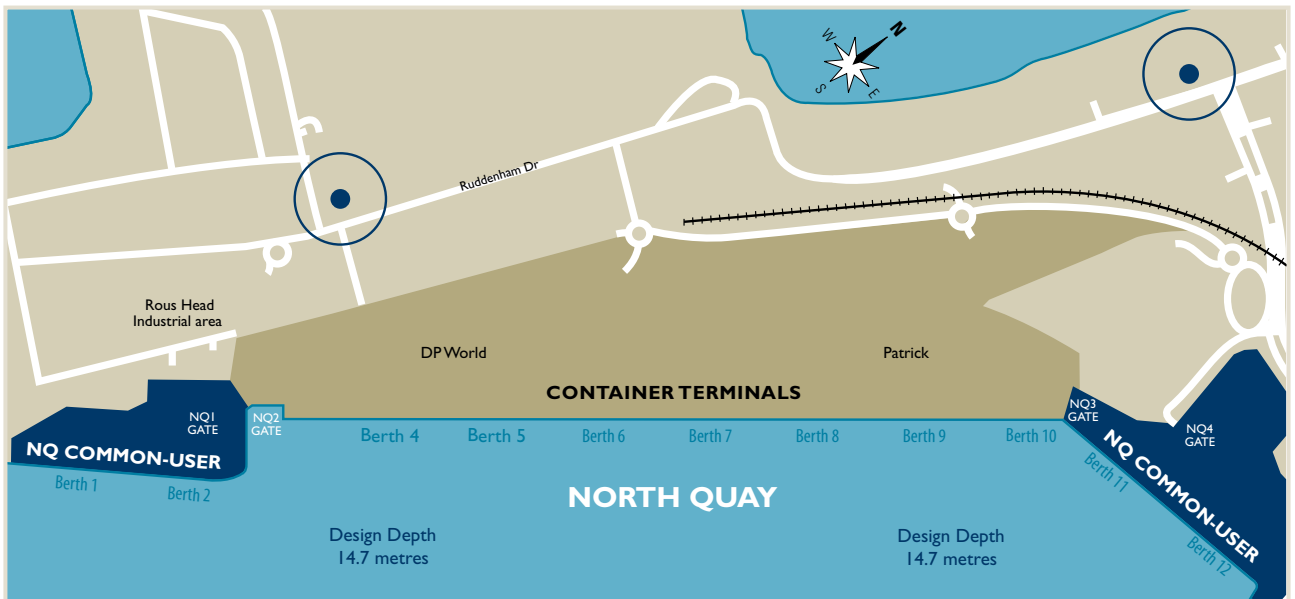

- Container terminal
- North Quay common-user area
- Muster points

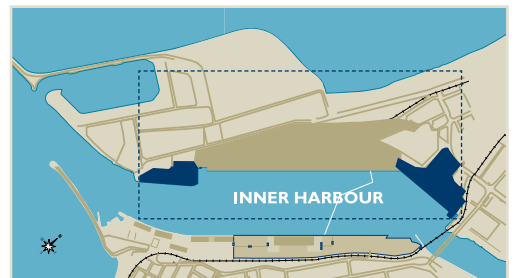



FREMANTLE PORTS

1 Cliff Street FREMANTLE
Western Australia 6160

Tel: +61 8 9430 3555

Fax: +61 8 9336 1391

E-mail: mail@fremantleports.com.au

www.fremantleports.com.au

